Guess who washes and dries perfectly, up to 150 lbs of vegetables in only 5 minutes?





ATIR & IDROVER





THE FEATURES

- · washing intensity adjusting control
- water discharge adjusting control
- · rotating water inlet faucet
- · washing basin easy to inspect and clean
- · low voltage wall control panel
- ATIR I tilting version equipped with hydraulic device for automatic product unloading
- · entirely made of stainless steel
- · adjustable feet
- pump protection guard

THE OPERATION

Vegetables, placed in the water of the wash basin, are rapidly but gently moved by the water whirlpool created by the pump. This whirl detaches the most hidden impurities and soil particles. Then it brings them into the outer drum, through the holes on the side and on the bottom of the basin. The outer drum gets them to the discharge.

DRAWING KEY

- 1) wall control panel
- 2) washer working lamp
- 3) voltage warning lamp
- 4) manual-automatic selector
- 5) timer
- 6) washing adjustement valve
- 7) drain adjustement valve
- 8) up-stroke/down-stroke tilting selector
- 9) tilting push button
- 10) cold water inlet
- 11) electric connection
- 12) drain

hygienic certainty

very cleanly washed products, which are confirmed by bacteriological test reports

labor savings

in a maximum of 3 minutes time, all kind of vegetables are automatically washed

versatility

ATIR is able to wash not only leaf vegetables (such as salad, spinach...) and heavy products (such as carrots, fennels...) but also fish, poultry and other foods

operational savings

ATIR needs only a socket and the proper quantity of water, for a perfect washing

easy to operate


to obtain a perfect wash, just adjust the washing flow, the water inlet and outlet. No filters have to be cleaned or are installed


strong construction

ATIR vegetable washers are entirely made of very thick stainless steel

safe to operate

the complete range of ATIR washers is NSF and UL listed

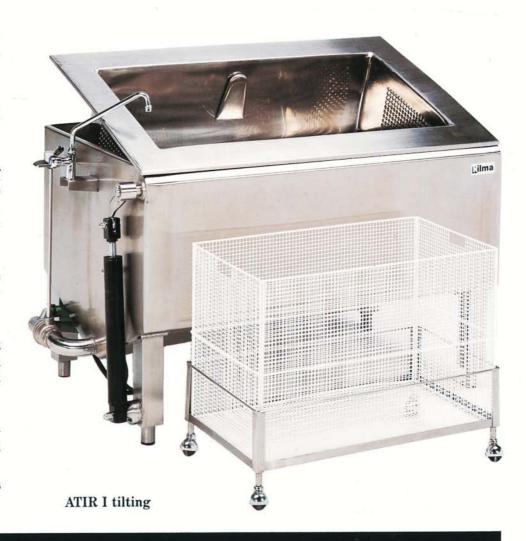

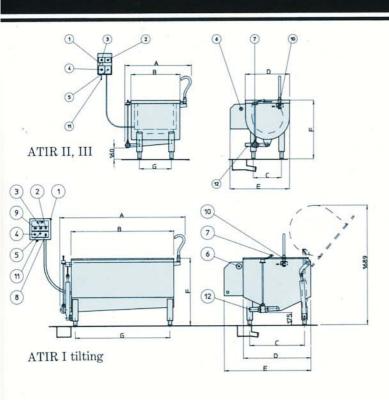

		ATIR I tilting	ATIR II	ATIR III
cold water ∅		1"	1"	1"
water drain Ø		2''	2"	1"1/2
drum capacity l (gal USA)		720 (190)	320 (84.5)	160 (42.3)
el. connection Amps		6,6	08V - 3ph - 60Hz 5,8	2
inst. power kW		2	1.1	0.6
weight kg (lb)		250 (550)	120 (265)	90 (199)
load capacity: - light veg. kg (lb) - heavy veg. kg (lb)		16 (35) 70 (155)	9 (20) 35 (77)	5 (11) 20 (44)
washing time: minutes		3	3	3
Dimensions mm (inch)	A	1765 (69-1/2")	1275 (50-1/5")	930 (36-3/5")
	В	1449 (57")	1000 (39-3/s")	690 (27-1/4")
	C	775 (30-1/2'')	470 (18-1/4")	400 (15-3/4")
	D	955 (37-9/16")	750 (29-1/2")	630 (24-13/16'')
	E	1225 (48-1/4")	975 (38-3/s'')	840 (33'')
	F	950 (37-3/8'')	860 (33-7/s")	830 (32-5/8")
	G	1335 (52-9/16")	750 (29-1/2")	450 (17-5/s")



IDROVER 50

vegetable dryer

- salad dressing savings
 thanks to the perfect drying of all kind of
 vegetables, dressings do not run
- labor savings each drying cycle requires only 1 minute
- perfect looking salads
 IDROVER 50 dries even the most delicate salad, without damaging it
- safe to operate IDROVER 50 is NSF and UL listed

THE FEATURES

- housing, drum and outer drum made of stainless steel
- cover made of food grade plastic
- base with holes for floor attachement
- · removable self-balancing basket
- self-braking motor 1.1 kW, 208V, 3ph, 60Hz, 7Amps
- water discharge Ø 2"
- low voltage wall control panel
- load capacity: 5 Kg (11 lb) leaf vegetables 10 Kg (22 lb) heavy vegetables
- drying time/cycle: 1 minute
- net weight: 100 Kg (221 lb)
- safety: micro switch for stopping basket at cover opening

DRAWING KEY

- 1) wall control panel
- 2) voltage warning lamp
- 3) stop push button
- 4) timer
- 5) electric connection
- 6) drain





