



Merco 32 Capacity Booster

Higher flow capacity during peak periods – energy savings during lower production levels

Upgrading to increase capacity up to 50 %

Increased demand for ethanol and high fructose corn syrup has renewed interest in new processing strategies and equipment to improve efficiency and overall process economics.

To improve separation performance, Alfa Laval introduces the Merco 32 Capacity Booster upgrade. This is a straightforward modification of your Merco H-30 separator at a minimal capital cost, rather than purchasing a new separator. The installation costs will be at a minimum level. Yet it brings you the benefits of both increased flow capacity or better separation performance and reduced energy consumption per unit.

- Increased capacity of up to 50 %
- Energy savings up to 25 %
- Longer service life
- Easier to inspect and service
- Rotor assembly flexibility for PS and GT/MST/CL application

Increase capacity

Simply replace your Alfa Laval Merco H-30 rotor assembly and feed inlet assembly with a new AlfaLaval Merco 32 rotor assembly and feed inlet-assembly.

In addition to enhancing capacity, the Capacity Booster Upgrade includes the new E-25 high efficiency nozzles with a special tool that makes the nozzles much easier to install and remove. The nozzles are made from one piece of abrasion resistant material that results in extended nozzle life. The nozzles are also installed in bushings which minimize the risk of damage to the rotor bowl wall.

Easier to save energy

Save energy whenever the additional capacity isn't required. You have the flexibility to increase feed intake during peak production periods and reduce it as production slows. When operating at reduced production capacity, you can realize energy savings up to 25 %.

Easier to inspect and maintain

Does inspecting and cleaning your disc stack take too much time? Then you'll love two of the most useful features of the new rotor assembly. A new lock ring cuts the time required to remove the bowl cover for routine inspection. And a new design gives you fast access to the return tubes for inspection.



Merco 32 GOF with motor

Rather than spending time and energy to remove individual discs manually, simply lift the feedwell to remove the entire disc stack assembly at once. The majority of the rotor parts are common and can be easily adapted for all applications and the cost of the spares are significantly reduced. Hydraulic hoist cylinder assembly design for simplified maintenance.


Options

Double underflow volute upgrade
For additional energy savings
at higher nozzle flow.



Operating principles

The feed, consisting of both liquid and solids, is led into the rotating centrifuge bowl from the top via a stationary inlet (1). It is then accelerated in a distributor (2), before entering the disc stack (3). The actual separation process takes place between the discs, with the liquid phase moving through the disc stack towards the center of the bowl. When it has reached the center, it is then discharged over a power ring (4). The solids, which are heavier, collect at the periphery of the bowl, and are then continuously discharged through the nozzles (5). Part of the concentrated solids discharged through these nozzles can be recirculated into the bowl periphery through the return tubes (6), via the return chamber (7). The wash water used to free solubles and other impurities from the solids can also be recirculated to the periphery of the bowl the same way. The bowl is mounted on a vertical lower shaft (8) that is driven via belts by a vertically mounted motor.

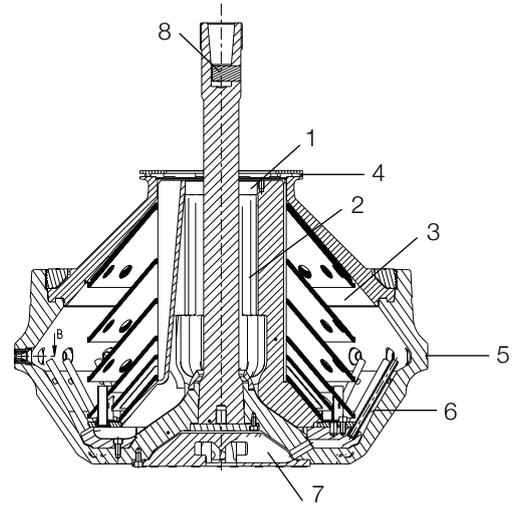

Typical bowl drawing of a nozzle centrifuge with a solids recirculation system. The details do not necessarily correspond to the centrifuge described.

Utilities consumption

Electric power	max. 160 kW
Safety water	max. 120 m ³ /h (530 US gpm) ¹⁾
Wash water	max. 50 m ³ /h (220 US gpm) ²⁾

¹⁾ The bowl should be filled with liquid during normal operation and shut-down. If process liquid is not available, safety water should be used. The above figures refer to nozzle size at 2,950 rpm bowl speed (MST). The safety water feed to the separator should always exceed the nozzle flow by 10%.

²⁾ Primary separator (PS) only.

Material data

Rotor	s.s. 1.4462 UNS S 31803
Rotor housing	Cast s.s. ASTM A-743 / 316 s.s
Machine base, column and radial arm	Cast Iron
Gaskets and O-rings	Nitrile rubber

Technical specifications

Throughput capacity	max. 170 m ³ /h (750 US gpm) ¹⁾
Nozzle flow	max. 110 m ³ /h (480 US gpm) ²⁾
Bowl liquid volume	125/133 litre (GT/MST/CL / PS)
Bowl speed	max. 3337 rpm ³⁾
Motor power installed	110/132/160 kW (150/180/215 HP)
Feed temperature range	0–65°C

¹⁾ Actual throughput capacity depends on particle sizes, densities, viscosity and require degree of separation.

²⁾ Wet solids. Actual flow depends on the power consumption in conjunction with the actual feed flow.

³⁾ Actual bowl speed depends on flowrate, etc.

How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at www.alfalaval.com